


TABLE 1: CASSETTE SPECIFIC COMPONENTS		
PRODUCT FAMILY	CASSETTE PART NUMBER	CASSETTE DESCRIPTION
24 FIBER LC SPLICE CASSETTE PRELOADED WITH DISCRETE PIGTAILS	FDS9N-24-10P	24F FRONT ACCESS SPLICE CASSETTE LC OS2 UPC DISCRETE PIGTAILS, STD IL
	FDS9N-24-LAP	24F FRONT ACCESS SPLICE CASSETTE LC OS2 APC DISCRETE PIGTAILS, STD IL
	FDSZA-24-10P	24F FRONT ACCESS SPLICE CASSETTE LC OM4 DISCRETE PIGTAILS, ULTRA IL
	FDSSA-24-10P	24F FRONT ACCESS SPLICE CASSETTE LC OM4+ DISCRETE PIGTAILS, ULTRA IL
	FDSWA-24-10P	24F FRONT ACCESS SPLICE CASSETTE LC OM5 DISCRETE PIGTAILS, ULTRA IL
	FDSZO-24-10P	24F FRONT ACCESS SPLICE CASSETTE LC OM4 DISCRETE PIGTAILS, OPT IL
24 FIBER LC SPLICE CASSETTE PRELOADED WITH RIBBON PIGTAILS	FDSZA-24-10R	24F FRONT ACCESS SPLICE CASSETTE LC O4 RIBBON PIGTAILS, ULTRA IL
	FDSZO-24-10R	24F FRONT ACCESS SPLICE CASSETTE LC OM4 RIBBON PIGTAILS, OPT IL
	FDS9N-24-10R	24F FRONT ACCESS SPLICE CASSETTE LC OS2 UPC RIBBON PIGTAILS, STD IL
	FDS9N-24-LAR	24F FRONT ACCESS SPLICE CASSETTE LC OS2 APC RIBBON PIGTAILS, STD IL

WARNING: UNMATED CONNECTORS MAY EMIT INVISIBLE LASER RADIATION. MAINTAIN DUST CAPS ON UNMATED CONNECTORS.

Fiber optic cable is sensitive to excessive pulling, bending, and crushing forces. Consult the manufacturer's cable specification sheet for specific cable to use.

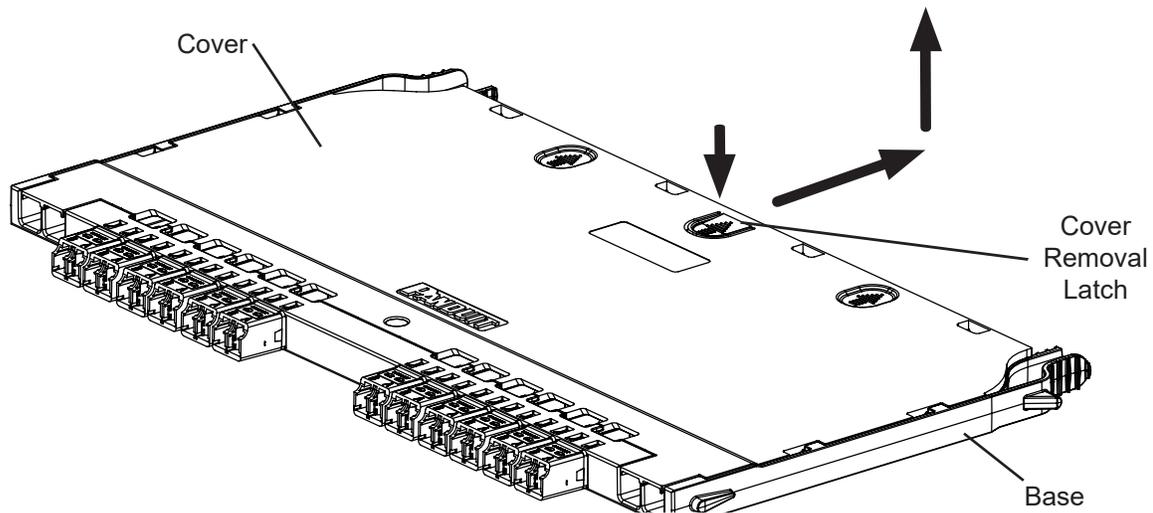

To remove the cover:

1. While pressing down on the Cover Removal Latch, slide the cover backwards until it stops
2. Then lift the cover upwards

Figure 1

Internal Features

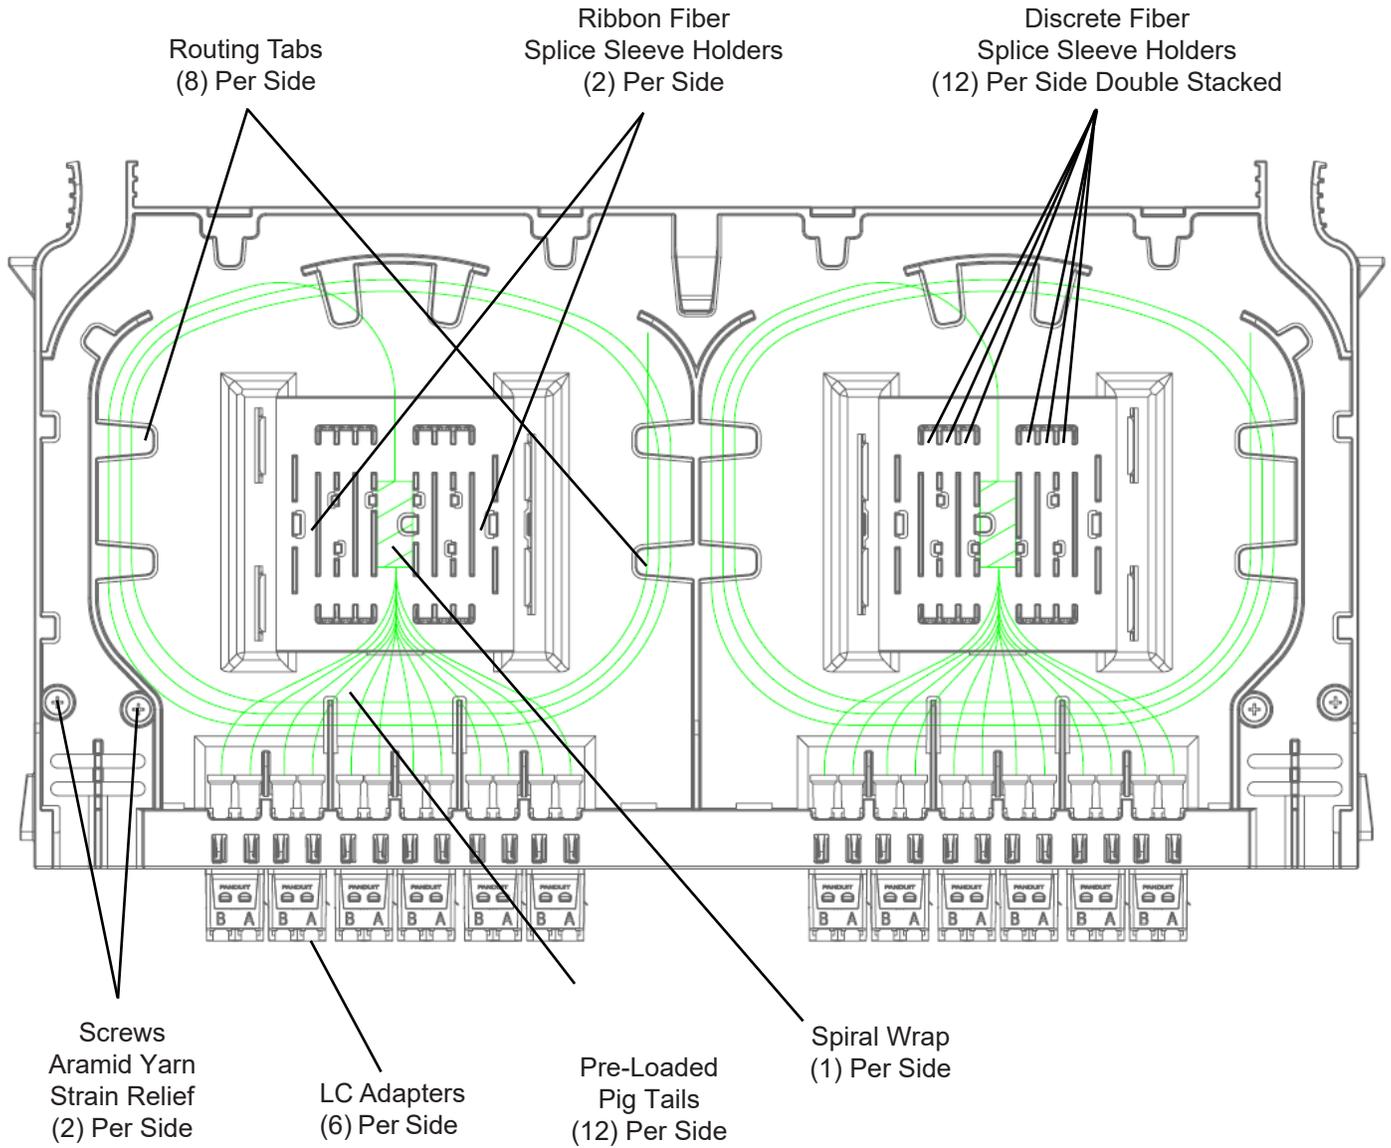


Figure 2

Fiber Wire Input Options

Option #1. Installing cable directly onto the cassette

1. Strip incoming outer cable field jacket 39 inches [990mm], secure with Pan-Ty™ cable ties and aramid yarn with screw (optional).

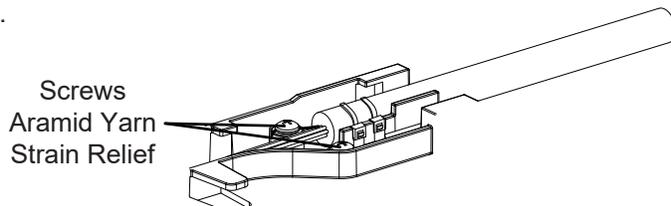


Figure 3

2. Expose all fiber ends for splicing. Slide a splice sleeve onto either the pigtail or field fiber. Splice all fibers and heat splice sleeve(s). Refer to splicer manufacturer best practice instructions.

Option #2. Installing protection (furcation) tube(s) onto the cassette

1. Attach the furcation tube(s) onto the cassette utilizing Pan-Ty cable ties, leaving 39 inches [990mm] of exposed fiber in preparation for splice

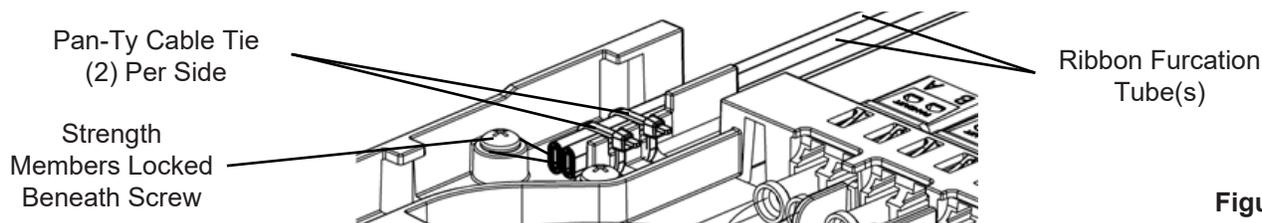


Figure 4

2. Expose all fiber ends for splicing. Slide a splice sleeve onto either the pigtail or field fiber. Splice all fibers and heat splice sleeve(s). Refer to splicer manufacturer best practice instructions.

Option #3. Installing protection tube(s) onto the cassette

1. Attach the protection tube(s) onto the cassette utilizing Pan-Ty cable ties, leaving 39 inches [990mm] of exposed fiber in preparation for splice

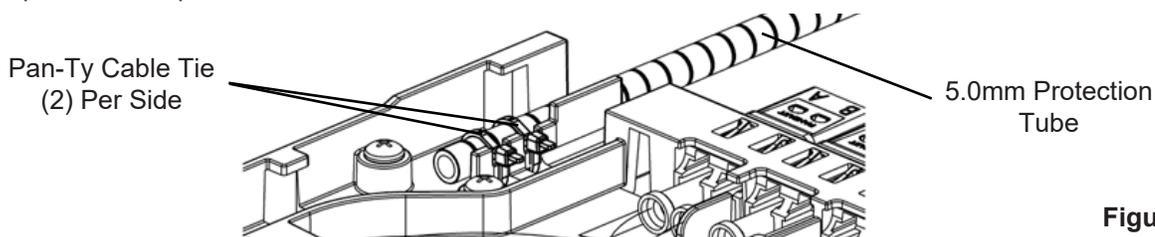


Figure 5

2. Expose all fiber ends for splicing. Slide a splice sleeve onto either the pigtail or field fiber. Splice all fibers and heat splice sleeve(s). Refer to splicer manufacturer best practice instructions.

NOTE:

Be mindful of the following during installation:

1. Maximum Input / Output cable diameter of 0.276 inches [7mm] X 4 positions
2. Maintain a minimum fiber/cable bend radii of 1 inch [25.4mm]
3. Avoid over-tightening the cable ties, crushing the fiber cable
4. (1) Pan-Ty Cable tie per side if both entry slots are being used
5. Up to (2) splice sleeves can be stacked under each splice sleeve holder
6. Furcation kits FOBKF**YM1 and FOBKF**AM1 can be purchased separately
7. Reference Appendix "C" for available Protection Tube Kits

Discrete Splice. Cable Input to LC Adapter Output - Left Hand Input Wire Routing

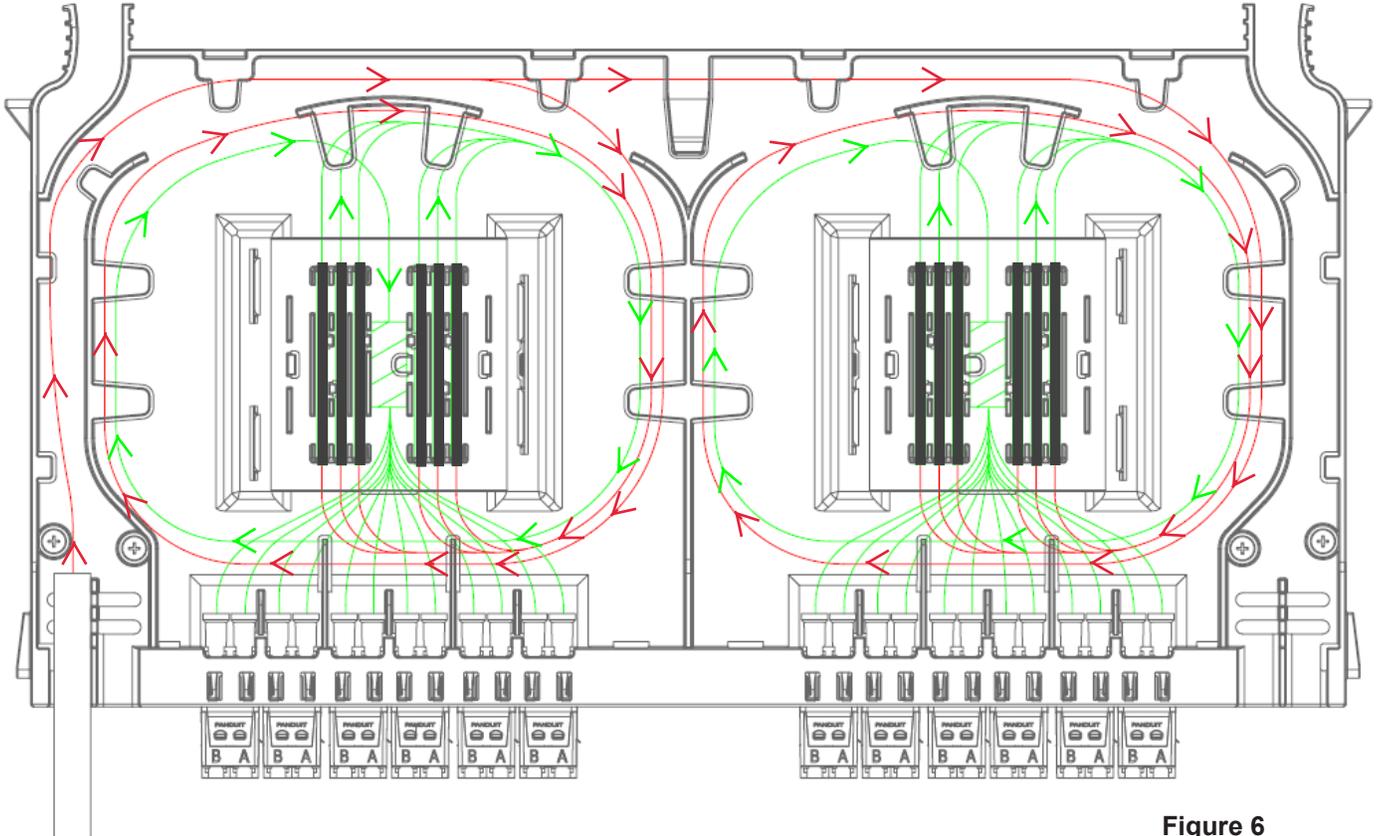


Figure 6

Discrete Splice. Cable Input to LC Adapter Output - Right Hand Input Wire Routing

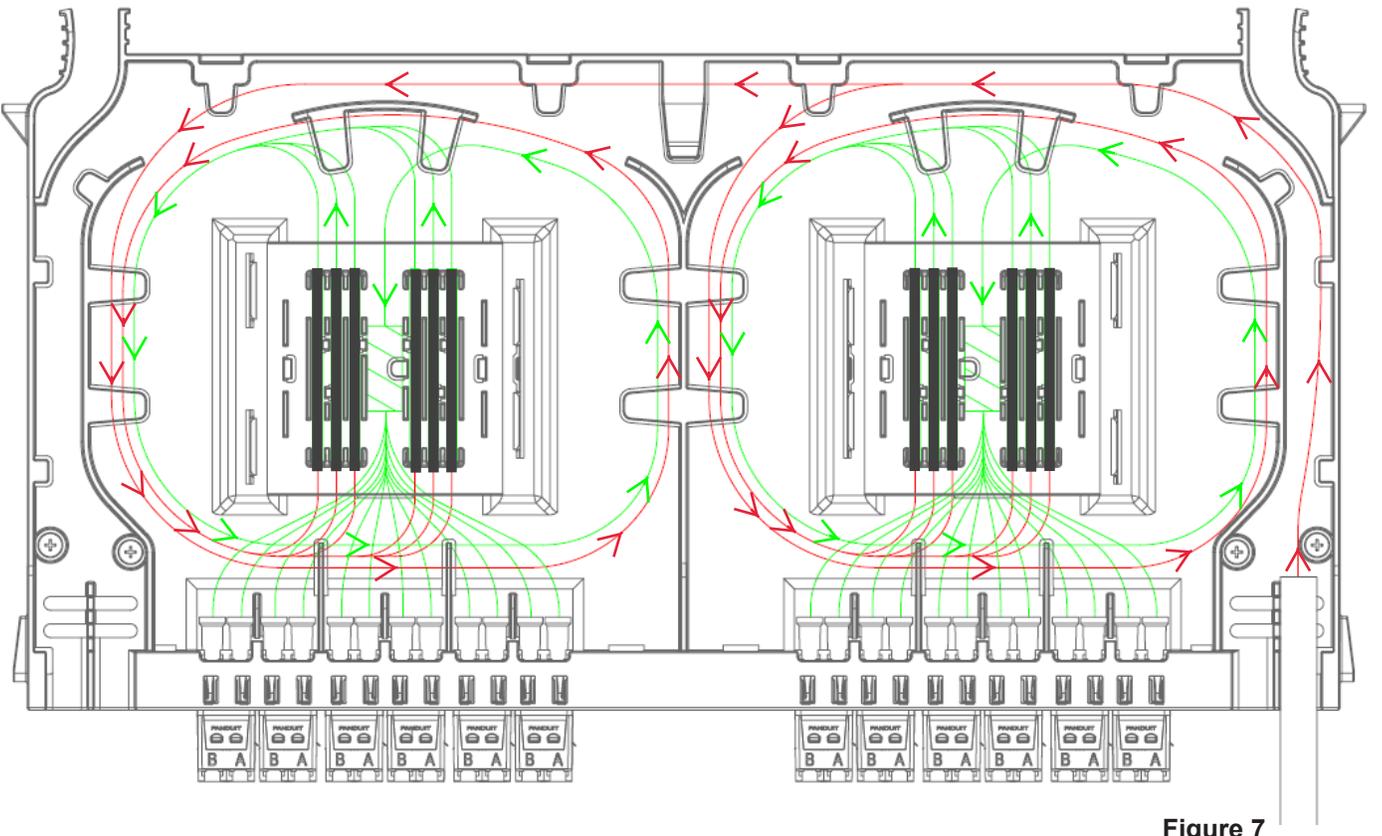


Figure 7

Ribbon Splice. Cable Input to LC Adapter Output - Left Hand Input Wire Routing

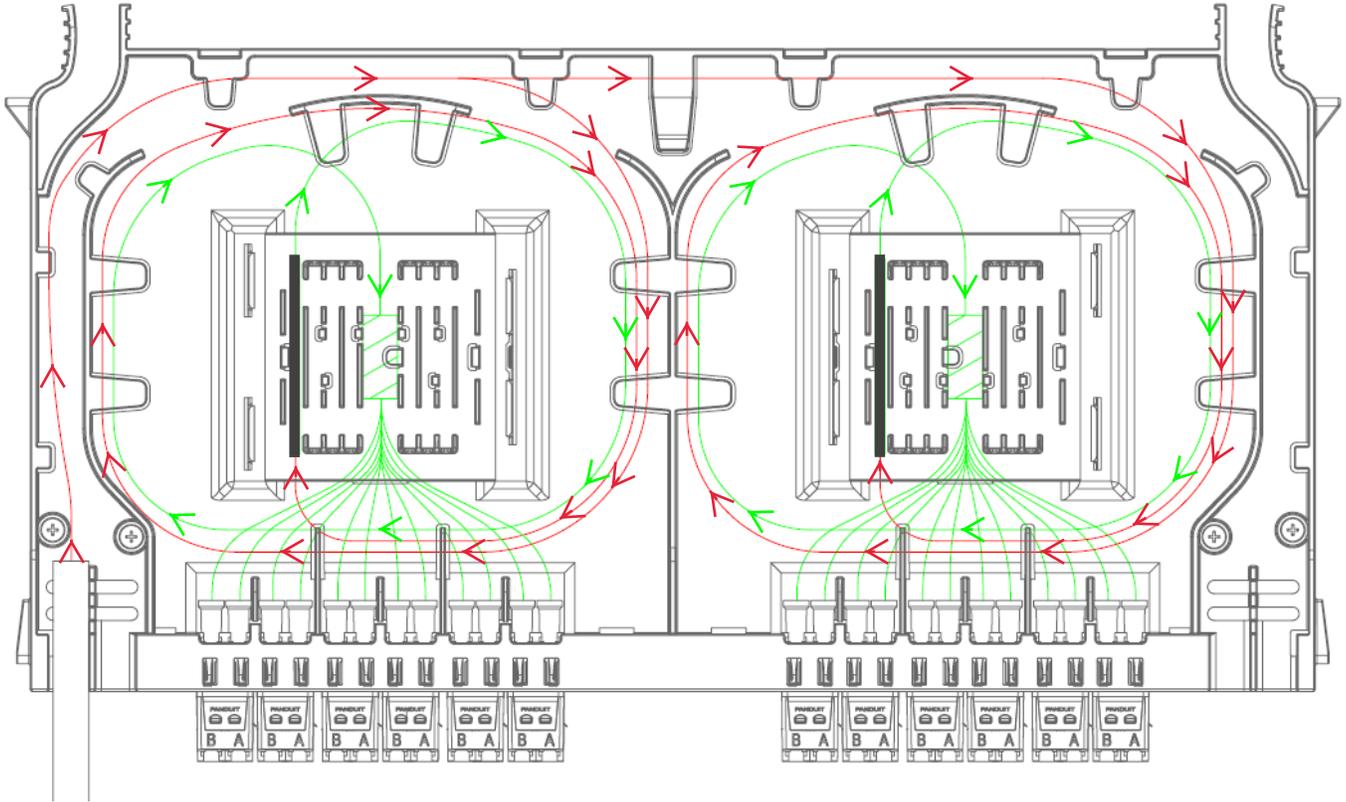


Figure 8

Ribbon Splice. Cable Input to LC Adapter Output - Right Hand Input Wire Routing


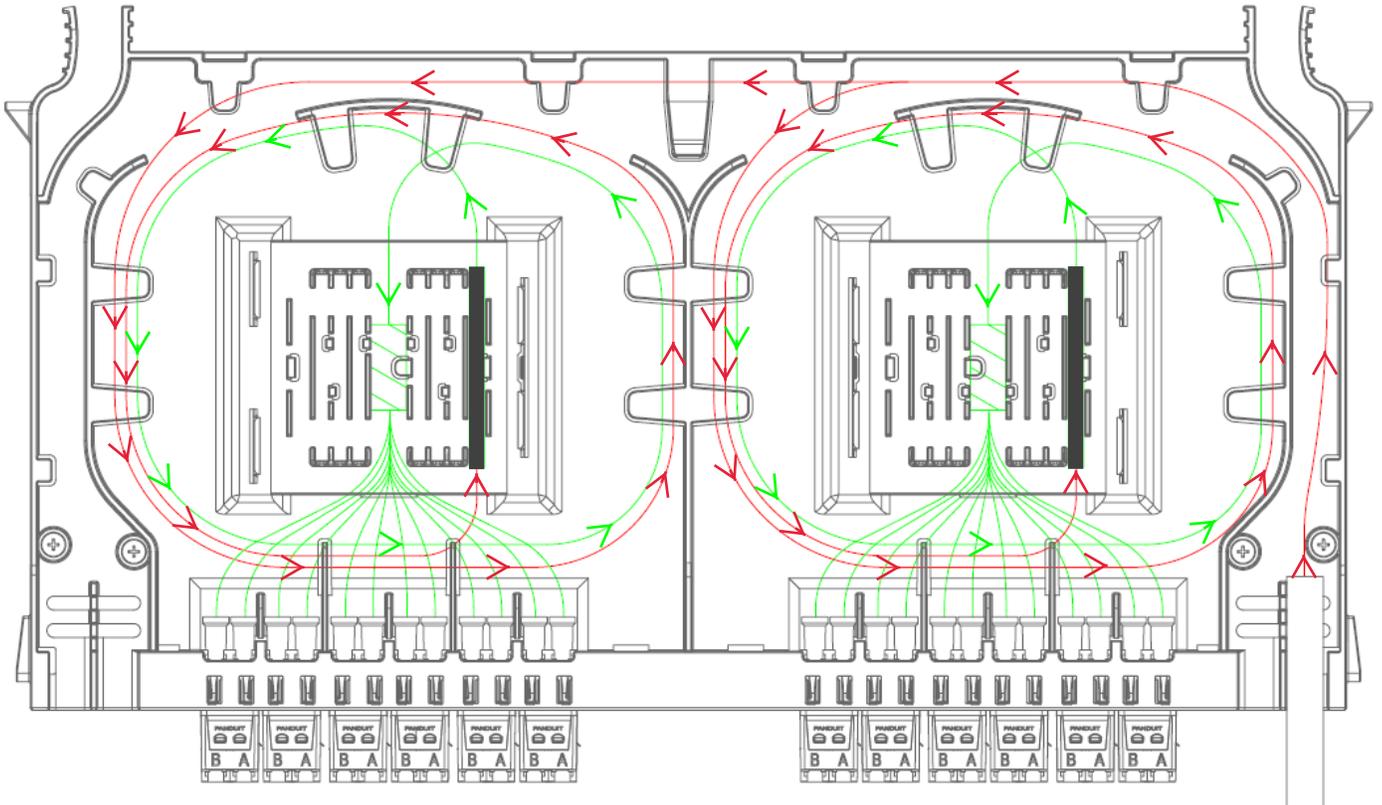


Figure 9

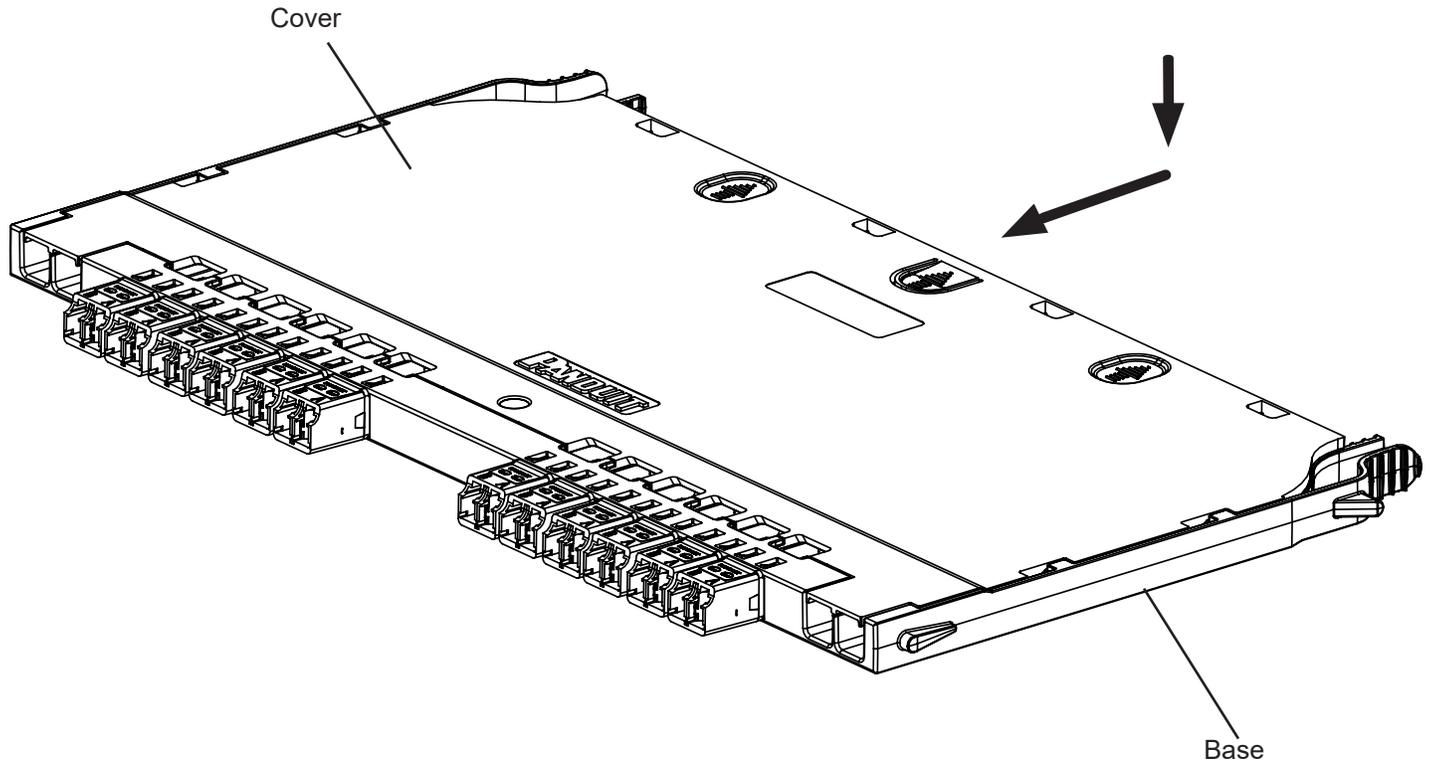

To install the cover:

1. Place the cover on the base, aligning the side cover latches
2. Slide the cover forward until the cover latch engages with the base

Figure 10

Additional splice protectors available from Panduit:

- *FOSP40-C: Single (Discrete) Fiber Splice Protection (QTY: 100 pcs)
- *FOWPR40-L: Ribbon Fiber Splice Protectors (QTY: 50 pcs)


APPENDIX "A" - FlexCore™ Cassette / ODF System Installation Instruction Matrix

Specification Number	Description
FS187	Fiber Breakout Kit, Flat Ribbon Furcation Tube (P/N FOBKF**(Y/A)M1) Installation Instructions
FS190	FlexCore™ Optical Distribution Frame Installation Instructions
FS191	FlexCore™ 150mm Vertical Cable Manager Installation Instructions
FS192	FlexCore™ 300mm Vertical Cable manager
FS193	FlexCore™ Single Hinge Front Doors Installation Instructions
FS194	FlexCore™ End Panels Installation Instructions
FS198	FlexCore™ Spool - Single
FS199	FlexCore™ Spools - 6 Pack Color Coordinated Kit
FS200	FlexCore™ Fusion Splice Cassette - Cable to LC Adapter Installation Instructions
FS201	FlexCore™ Fusion Splice Cassette - Cable to Cable Installation Instructions
FS202	FlexCore™ Cassettes (LC/MPO, LC/Tether)
FS203	FlexCore™ 4RU Universal Enclosure installation Instructions
FS204	FlexCore™ Front Access Optical Distribution Frame Patchcord Routing Guide
FS205	FlexCore™ Frame Rear panel
FS206	FlexCore™ Front Access Ingress / Egress Cabling Guide


For copies of FlexCore™ Optical Distribution Frame System installation instructions, please visit www.panduit.com and search for the specific Specification Number

APPENDIX "B" - Cable Ingress / Egress Options

Cable To LC Adapter Cassettes

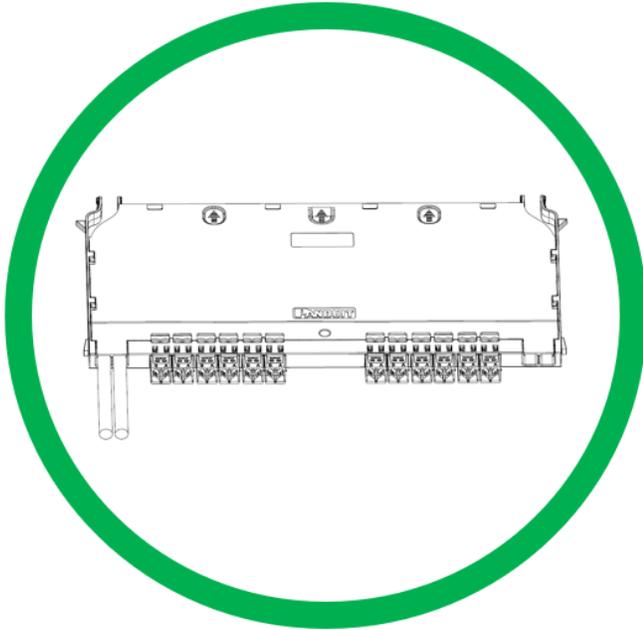

Ingress cable enters on one side (Left or Right)

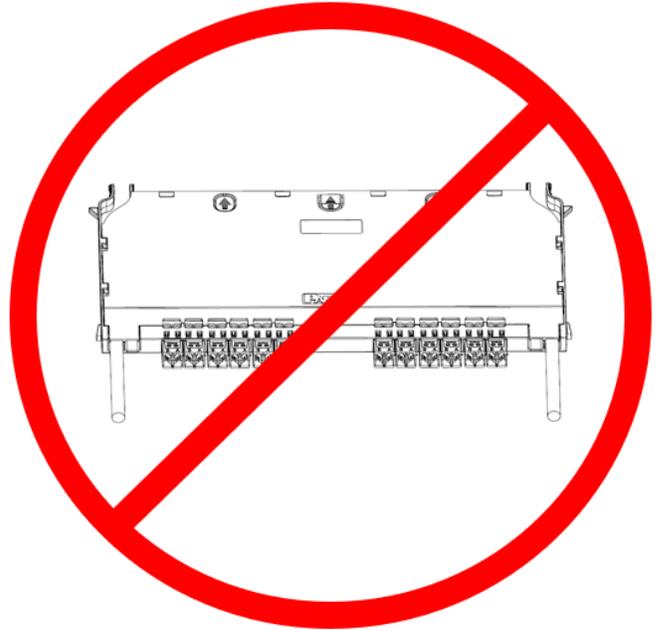

Ingress cable enters on both sides (Left and Right)

For Instructions in Local Languages and Technical Support:

http://www.panduit.com/resources/install_maintain.asp

PANDUIT
www.panduit.com

E-mail: techsupport@panduit.com
Phone: 866-405-6654

APPENDIX "C" - Protection Tubing Options

QuickNet FIBER BREAKOUT / FURCATION KITS				
Part Number	Jacket Color	Fiber Count	# Of Tubes	Cable OD (Max)
SINGLEMODE				
FOBKF24YM1	Yellow	24	2	0.38" [9.6mm]
FOBKF48YM1	Yellow	48	4	0.45" [11.4mm]
FOBKF72YM1	Yellow	72	6	0.45" [11.4mm]
FOBKF96YM1	Yellow	96	8	0.45" [11.4mm]
FOBKF144YM1	Yellow	144	12	0.625" [15.9mm]
FOBKF288YM1	Yellow	288	24	0.875" [22.2mm]
FOBKF432YM1	Yellow	432	36	0.90" [22.8mm]
FOBKF576YM1	Yellow	576	48	1.07" [27.2mm]
FOBKF864YM1	Yellow	864	72	1.07" [27.2mm]
MULTIMODE				
FOBKF24AM1	Aqua	24	2	0.38" [9.6mm]
FOBKF48AM1	Aqua	48	4	0.45" [11.4mm]
FOBKF72AM1	Aqua	72	6	0.45" [11.4mm]
FOBKF96AM1	Aqua	96	8	0.45" [11.4mm]
FOBKF144AM1	Aqua	144	12	0.625" [15.9mm]

PROTECTIVE TUBES		
Part Number	Description	# Of Tubes
DFMX5KITBL	Breakout Kit with 2ft Protective Tube	12
FM5PPBLF2.0-12	2ft Protective Tube	12
FM5PPBLF4.0-12	4ft Protective Tube	12
FM5PPBLF8.0-12	8ft Protective Tube	12

For Instructions in Local Languages
and Technical Support:

http://www.panduit.com/resources/install_maintain.asp

PANDUIT
www.panduit.com

E-mail:
techsupport@panduit.com

Phone:
866-405-6654