

## Fast-Cure® Anaerobic Adhesive-Style Connectors

### APPLICATION

Fast-Cure anaerobic adhesive-style connectors are designed for quick and easy termination in the field. Fast-Cure connectors are available in single-mode and multimode versions in LC, SC, and ST® styles. Fast-Cure connectors are designed for indoor and outdoor applications where reliability, durability, and ease of installation are an important consideration. Typical installations are in premise LAN environments, or anywhere adhesive-style connectors are specified.



Pictured (left to right): ST Connector, SC Connector, and LC Connector.

### SPECIFICATION

The Fast-Cure anaerobic adhesive-style fiber optic connector shall meet or exceed the requirements described in ANSI/TIA-568-C.3 and 604 standards. All plastic components shall be molded of 94 V-0 rated plastic. The connector shall be field-polished, field-installable, and does not require a curing oven or proprietary tool to facilitate the termination of the fiber. The connector shall be available in LC, SC, or ST single-mode or multimode configurations terminated on 900 µm buffered fiber or 3-mm jacketed fiber. Typical connector insertion loss shall be 0.2dB. Typical connector return loss shall be greater than 25dB (multimode) and 55dB (single-mode).

### FEATURES

- Typical termination in less than three minutes
- Low insertion loss connection
- Higher fiber retention than mechanical connectors
- No curing oven or proprietary tool required
- Compatible with MOS, QuickPort®, SDX, and LightSpace® adapter plates
- Accessory for duplex clip sold separately

### DESIGN CONSIDERATIONS

- Single-mode and multimode versions
- Precision pre-radiused zirconia ferrules
- Supports 900 µm buffered fiber or 3-mm jacketed fiber
- High cable retention crimp for jacketed fiber
- Recommended for indoor and outdoor usage
- Body of ST connectors are metal

### PERFORMANCE SPECIFICATIONS

| Parameter                                 | Value                         |
|---|-------------------------------|
| Insertion Loss (Single-mode or Multimode) | Typical: 0.2dB<br>Max: <0.3dB |
| Return Loss (Single-mode)                 | Typical: >55dB                |
| Return Loss (Multimode)                   | Typical: >25dB                |
| Operating Temperature                     | -40 °C to +85 °C              |

### STANDARDS COMPLIANCE

- Meets ANSI/TIA-568-C.3 performance requirements
- Meets ANSI/TIA-604-2 (ST), -3 (SC), -10A (LC) Connector Intermateability Standards
- Meets GR-326; General Requirement for Single-mode Connectors

### COUNTRY OF ORIGIN

Taiwan

### WARRANTY INFORMATION


For a copy of Leviton product warranties, visit [www.leviton.com/warranty](http://www.leviton.com/warranty).

49990-xxx, 49800-xxx


## ELECTRONIC FILES

For CAD files, typical specs, or technical drawings (.DXF, .DWG), visit [www.leviton.com](http://www.leviton.com).


### Fast-Cure ST® Connector

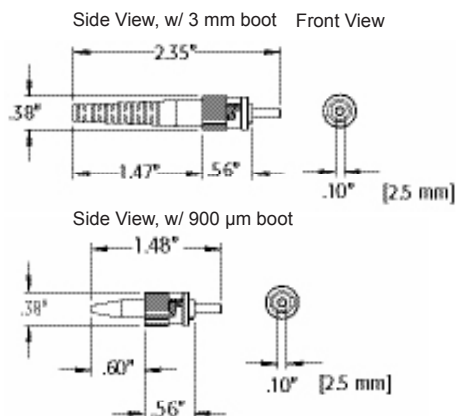

### Fast-Cure LC Connector

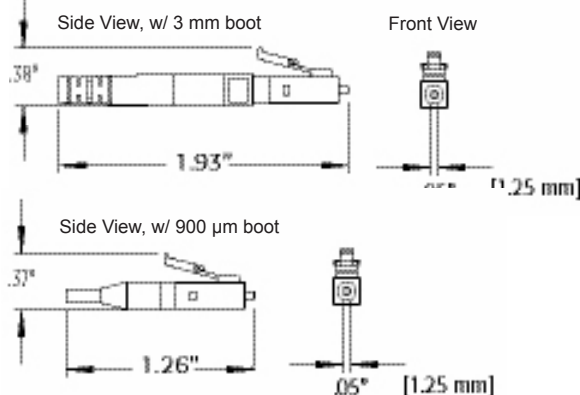

### Fast-Cure SC Connector

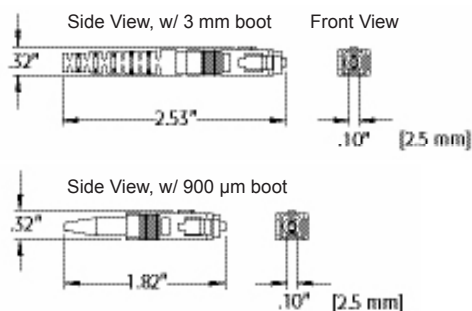

49990-xxx, 49800-xxx

## LEVITON FAST-CURE CONNECTORS

| Description                                   | Part No.  |
|---|-----------|
| Fast-Cure LC Multimode, beige w/ 3 mm boot    | 49990-ML2 |
| Fast-Cure LC LOMM, aqua w/ 3 mm boot          | 49990-LL2 |
| Fast-Cure LC Multimode, beige w/ 900 µm boot  | 49990-MDL |
| Fast-Cure LC LOMM, aqua w/ 900 µm boot        | 49990-LDL |
| Fast-Cure LC Single-mode, blue w/ 3 mm boot   | 49990-SL2 |
| Fast-Cure LC Single-mode, blue w/ 900 µm boot | 49990-SDL |
| Fast-Cure SC Multimode, beige                 | 49990-MSD |
| Fast-Cure SC LOMM, aqua                       | 49990-LSC |
| Fast-Cure SC Single-mode, blue                | 49990-SSC |
| Fast-Cure ST® Multimode                       | 49990-MST |
| Fast-Cure ST Single-mode                      | 49990-SST |

## LEVITON TOOLKITS & ACCESSORIES

| Description                           | Part No.  |
|---------------------------------------|-----------|
| Light Tool Kit                        | 49800-MTK |
| Fast-Cure Tool Kit                    | 49800-FTK |
| Consumable Kit                        | 49800-CON |
| LC Duplex Clip, beige, MM (bag of 25) | 49886-DLM |
| LC Duplex Clip, blue, SM (bag of 25)  | 49886-DLS |
| SC Duplex Clip, black (bag of 25)     | 49886-DSC |

*NOTE: Both single-mode and multimode SC and ST connectors come with a 3-mm and 900 µm boot. Please visit [www.leviton.com/fiber](http://www.leviton.com/fiber) for a detailed look at what is included in each kit.*

ST is a registered trademark of AT&T Inc.