

# CONNECTED ACCESS PORTAL, 2-DOOR CONTROLLER CAP2D

SECTION 28 13 00



## KEY FEATURES

<b>UNIT INTERFACE CAPABILITIES</b>	PIN/card/transmitter/RFID tag
<b>SCHEDULING CAPABILITIES</b>	Yes
<b>RADIO RECEIVER</b>	Optional

## SPECIFICATIONS

<b>DATA CONNECTIVITY</b>	Cellular/wired high-speed internet/DSL
<b>VOICE COMMUNICATION</b>	None
<b>POWER SUPPLY</b>	12VDC Transformer (not included in carton)
<b>PROGRAMMING (DATABASE MANAGEMENT)</b>	Cloud (myQ® Business™)
<b>REMOTE PROGRAMMING (DATABASE MANAGEMENT)</b>	Yes
<b>REALTIME EVENT MONITORING (EMAIL NOTIFICATIONS)</b>	Yes
<b>SOFTWARE</b>	myQ Business™
<b>WIEGAND INPUT DATA FORMAT</b>	26 and 30 Bit
<b>LOCAL USER CAPACITY</b>	25,000
<b>EVENT HISTORY</b>	8,000
<b>MAX NUMBER OF GATES/DOORS OF CONTROL (EACH)</b>	2
<b>WIEGAND INPUT</b>	2
<b>RELAY OUTPUT</b>	4 (2 primary, 2 auxilliary)
<b>MOUNTING OPTIONS</b>	Surface (fits on standard single gang box)
<b>OPERATING TEMPERATURE</b>	-31°F to 150°F (-35°C to 66°C)
<b>CAMERA READY</b>	No
<b>ANTI-TAMPER ALARM</b>	Yes
<b>WARRANTY</b>	2 years


## CONSTRUCTION

<b>ENCLOSURE MATERIAL</b>	Polycarbonate
---------------------------	---------------

# CONNECTED ACCESS PORTAL, 2-DOOR CONTROLLER CAP2D

SECTION 28 13 00

## DIMENSIONS

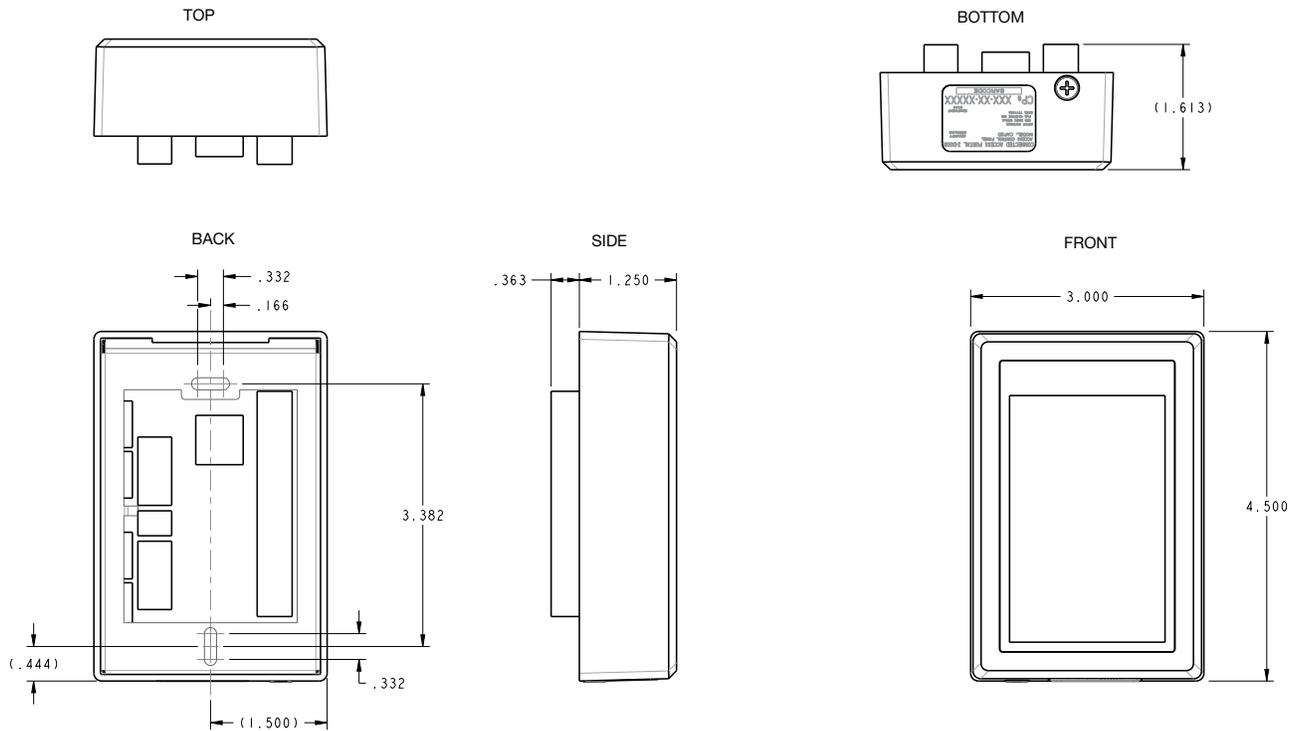

## RANGE

CAP2D Feature	Wired	Wire type	Range
Power 120VAC to 12VDC (from outlet to controller)	x	2 wire (14 AWG) 2 wire (16 AWG) 2 wire (18 AWG)	Up to 300 ft. Up to 200 ft. Up to 100 ft.
PoE (Power of Internet) - 48VDC	x	CAT5 or CAT6	Up to 328 ft.
Wiegand accessory wiring	x	7 wire (18-22 AWG)	Up to 500 ft.
Relay output wiring	x	2 wire (18-24 AWG)	Up to 2500 ft.
Exit Request (REX)	x	2 wire (18-24 AWG)	Up to 500 ft.
Supervised input	x	2 wire (18-24 AWG)	Up to 500 ft.
RJ-45 Internet	x	CAT5 or CAT6	Up to 328 ft.