


2

1


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

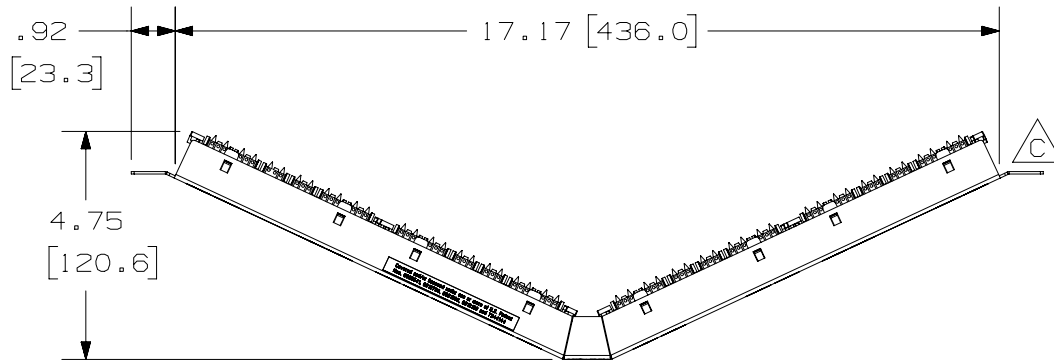

PANDUIT PART NUMBER	WEIGHT
DPA486X88TGY	2.36 lb (1070.48 g)
DPA486X88TGWH	2.36 lb (1070.48 g)

NOTES:

- SEE CURRENT CATALOG FOR VARIOUS APPLICATIONS AS WELL AS OPTIONAL ICONS.
- MATERIAL:
PANEL HOUSING: STEEL
RJ45 MODULES: THERMOPLASTIC RESIN UL94V-0
PUNCHDOWN BLOCKS: THERMOPLASTIC RESIN UL94V-0
BEZEL ASSEMBLY: THERMOPLASTIC RESIN UL94H-B
RETENTION CAP: THERMOPLASTIC RESIN UL94V-0
- 48 PORT ANGLED PATCH PANEL 8 POSITION 8 WIRE.
- THE PATCH PANEL IS DESIGNED FOR MOUNTING TO 19" UNIVERSAL RACKS.
- FOUR (4) 12-24 X 1/2" ROUND HEAD SCREWS ARE PROVIDED FOR FASTENING TO RACKS.
- DIMENSIONS IN BRACKETS ARE IN METRIC.
- USE 110 STYLE TERMINATION TOOL FOR PUNCHDOWN.
- RETENTION CAPS (ONE PER CONNECTOR) PROVIDED FOR SNAP-IN ON TERMINATED CONNECTORS.

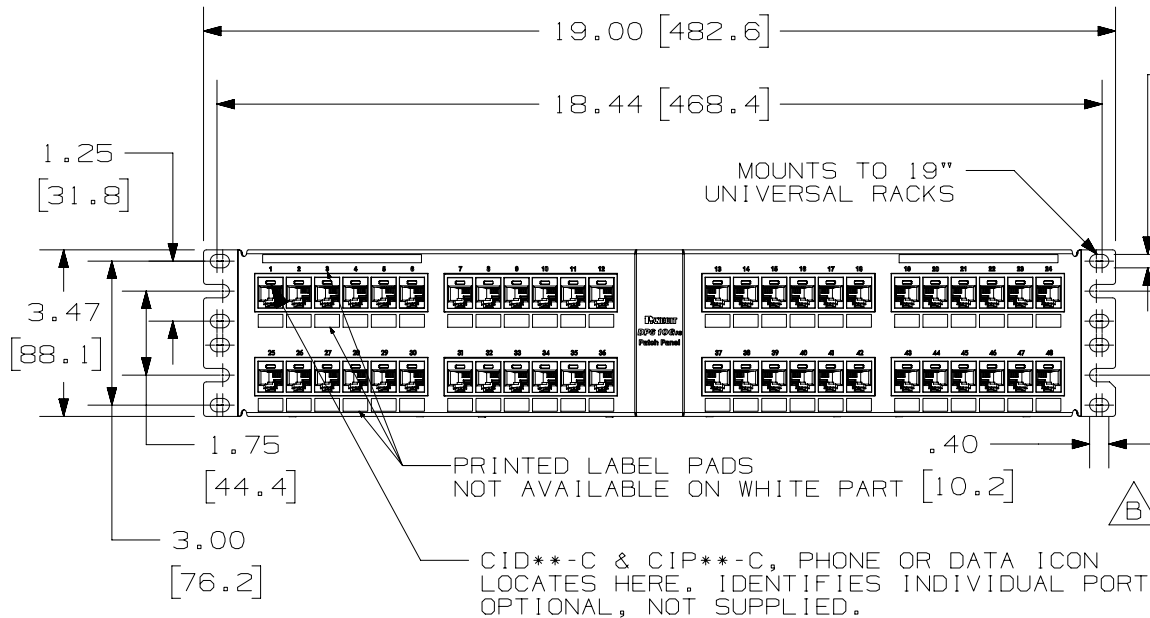

PART NUMBER

DPA486X88TGY ; DPA486X88TGWH

TITLE

DP6A 10GIG 48 PORT ANGLED PATCH PANEL

CUSTOMER DRAWING

ITEM REVISION NAME

M02479IZ/01

DATASET FILE NAME

M02479IZ_DC236/01A


UNLESS OTHERWISE SPECIFIED,
DIMENSIONAL TOLERANCES ARE: IN (mm)

.X ±

.XX ± .03 (.8)

.XXX ± .010 (.3)

ANGLES ±



THIRD ANGLE
PROJECTION

MATERIAL:

SEE NOTE 2

DRAWING NUMBER:

02479-236

DRAWN BY

LZ

DATE

3-4-06

CHK

CEF

SCALE