

DS-KD8003-IME1/Surface Video Intercom Module Door Station

HIKVISION[®]




Key Feature

- Modular door station for villa
- DS-KD8003 with its surface mouting accessories
- IP65 (DS-KD8003+DS-KD-ACW1)
- 2 MP HD video intercom function
- Supports sub-modules access
- Easy to and extend

Typical Application

System Framework for Apartment

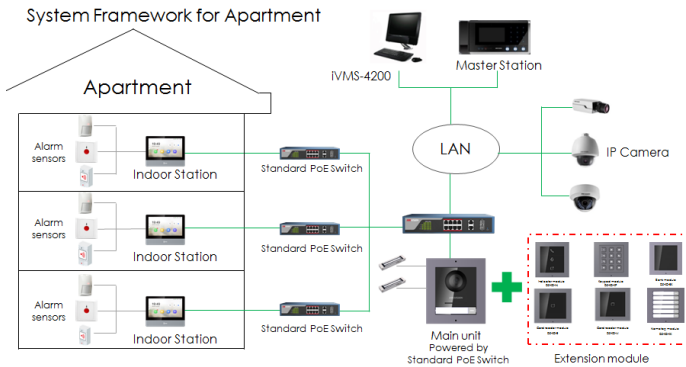

Operation method	Not supported.
------------------	----------------

Type	/
------	---

Resolution	/
------------	---

Video parameters

Supplement light	IR supplement
------------------	---------------

Video compression standard	H.264
----------------------------	-------

Lens	1
------	---

FOV	Horizontal: 180° Vertical: 96°
-----	--------------------------------

WDR	Support
-----	---------

Pixel	Main stream : 1920 × 1080
	Sub stream : 720 × 480

--	--

Audio parameters

Audio compression standard	G.711 U
----------------------------	---------

Audio input	Built-in omnidirectional microphone
-------------	-------------------------------------

Audio output	Built-in loudspeaker (More than 85 dB within 20 cm)
--------------	---

Audio compression bitrate	64 Kbps
---------------------------	---------

Audio quality	Noise suppression and echo cancellation
---------------	---

Volume adjustment	Adjustable
-------------------	------------

Specification

System parameters

Operation system	Embedded Linux operation system
Flash	16 MB
RAM	256 MB
CPU	Embedded MCU Processor

Display parameters

Size	/
------	---

Capacity	
Fingerprint capacity	0
User capacity	2000
Face capacity	0
Linked indoor station	100
Event capacity	/

Network parameters	
Communication protocol	TCP/IP, RSTP
Wired network	10/100 Mbps self-adaptive Ethernet
Wi-Fi	/
Bluetooth	/
3G/4G	/

Device interfaces	
Alarm input	4
Network interface	1
TAMPER	1
Exit button	2
RS-485	1
USB	0
Wiegand	0
TF card	0
Alarm output	0
Lock control	2
Door contact input	2
Power interface	1


General	
Button	1
Installation	Surface mounting
Indicator	0
Weight	With package: 554 g Without package: 375 g
Protective level	IP65
Power supply method	12 VDC/PoE (IEEE 802.3af)
Working temperature	-40° C to +55° C (-40° F to 131° F)
Working humidity	10% to 95%
Dimensions	98 mm × 99.8 mm × 43.9 mm (3.86" × 3.93" × 1.73")
Battery	/

Application environment	Outdoor
Power consumption	≤ 10 W

Available Model


DS-KD8003-IME1/Surface

Appearance and Interfaces

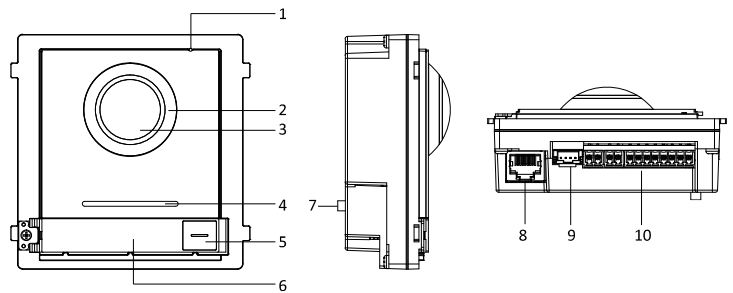

No.	Description	No.	Description
1	Microphone	6	Nametag
2	Low Illumination IR Supplement Light	7	TAMPER
3	Built-in Camera	8	Network Interface
4	Loudspeaker	9	Module-connecting Interface (output)
5	Call Button	10	Terminals

Dimension

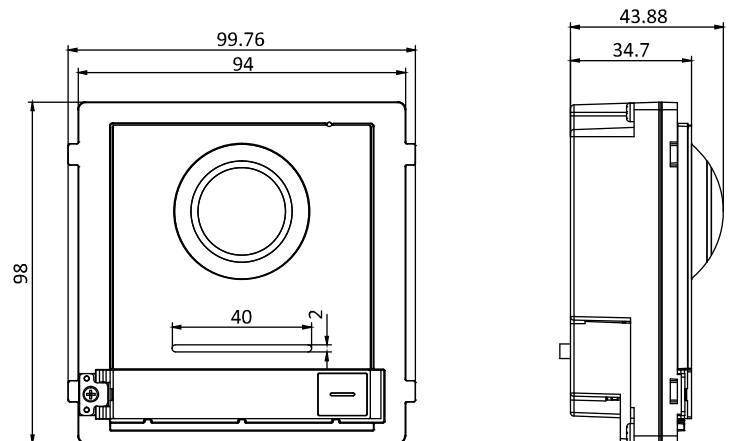

Distributed by

**HIKVISION®****Headquarters**

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA

T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia

T +61-2-8599-4233
salesau@hikvision.com

Hikvision India

T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada

T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand

T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe

T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy

T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil

T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey

T +90 (216)521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia

T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland

T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa

Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France

T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan

T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam

T +84-974270888
sales.vt@hikvision.com

Hikvision UAE

T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore

T +65-6684-4718
sg@hikvision.com

Hikvision Spain

T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent

T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong

T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia

T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea

T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision Poland

T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia

T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia

sales.colombia@hikvision.com