


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	WIRE RANGE AWG [mm ²]	TAB SIZE INCH [mm]	HOUSING COLOR	DIMENSIONS in. [mm]	
				L ± .03 [0,8]	MAX WIRE INSULATION DIA.
EDV18-250MK	#22-18 [0,5-1,0]	.250 X .032 [6,3 X 0,8]	RED	.83 [21,0]	.145 [3,70]
*EDV14-250MK	#16-14 [1,5-2,5]		BLUE	.83 [21,0]	.165 [4,20]



*NOT cULus LISTED

NOTES:

- cULus LISTED FOR:
 - STRANDED COPPER WIRE ONLY
 - 167°F (75°C) MAX TEMP RATING
 - 300V MAX VOLTAGE
- MATERIAL:
 - STAMPING: .016" (0.4) THK COPPER, NICKEL PLATED
 - HOUSING: VINYL
- INSTALLATION TOOLS: KST-2000C
- WIRE STRIP LENGTH 9/32" ^{+1/32}₋₀ [6,8mm ^{+0.8}₋₀]
- SEE WWW.PANDUIT.COM FOR PACKAGE QUANTITIES INDICATED BY PART NUMBER SUFFIX
- DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT
- PARTS ARE RoHS COMPLIANT

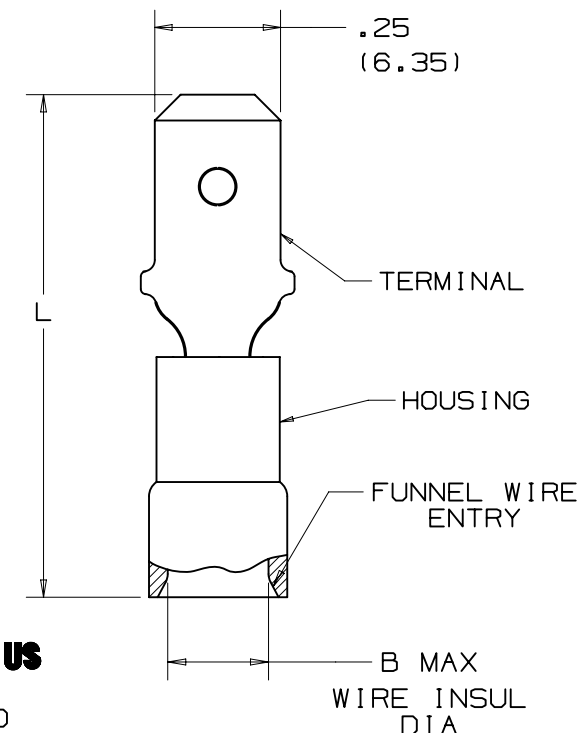

LISTED
19X5
E78522

TITLE					
STRONGHOLD MALE DISCONNECT (250 SERIES) VINYL INSULATED, BRAZED SEAM #22-14 AWG					
CUSTOMER DRAWING					
ITEM REVISION NAME					
02937NDY/01					
DATASET FILE NAME			MATERIAL: SEE NOTES		
02937NDY/01					
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .x ± .1 [2.54] .xxx ± .005 [.127] .xx ± .01 [.25] ANGLES ± 5 °			DRAWING NUMBER: 02937NDY - DC		
 THIRD ANGLE PROJECTION					
DRAWN BY	DATE	CHK	SCALE	SIZE	
JHNU	9/22	BDK	NTS	SHT 1 OF 1	A

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
01	1/28/23	JHNU	JHNU	MRWA	REVISED WIRE RANGE FOR EDV18-250MK: 22-18 WAS 22-16 REMOVED UL LISTING FROM EDV14-250MK	128553
00	9/22	JHNU	BDK	JADE	DRAWING RELEASED	125831