

# 1500 & 1600 Series™ Electric Strikes

Discover the Difference of the most advanced, modular electric strikes that work with most brands of cylindrical or mortise locks.

Experience a safer and more open world



## Dynamic | Flexible | Modular



4

Works with any lockset



Field adjustable integrated shim





















## Specifications for both 1500 and 1600 Strikes

### **Specifications**

- ANSI/BHMA A156.31, Grade 1
- UL 1034 burglary-resistant listed and suitable for outdoor use
- UL 294 listed
- RoHS compliant
- Holding force: Static strength 1,500 lbs
- UL 10C fire-rated, 3 hour single door (fail secure only)
- UL 10C fire-rated, 1-1/2 hour double door (fail secure only)
- CAN/ULC-S104 fire door conformant
- NFPA-252 fire door compliant
- ASTM-E152 fire door compliant
- California Fire Marshal listed
- **ANSI/SDI A250.13** windstorm resistant
- Florida Building Code approved TAS 201, 202, 203
- **ANSI-ASTM E330**
- 1500 Strike body depth 1-3/8"
- 1600 Strike body depth 1-5/8"
- Sustainability documentation

### Electrical (DC Continuous Duty)

- Dual voltage 12/24 VDC/VAC
- 240 mA at 12 VDC/120 mA at 24 VDC
- PoE friendly

#### **Features**

- Available in 7 finishes
- Field adjustable integrated shim
- Interchangeable faceplates and accessories
- Fully finished faceplate. keeper, case and trim
- Trim enhancer included
- ElectroLynx™ plug-in connectors
- Non-handed
- Internally mounted solenoid
- Tamper resistant
- Stainless steel construction
- SecuriCare five-year, no-fault, no questions asked warranty


#### **Options**

- LM Lock monitor
- DLM Dual lock monitors
- LMS\* Lock monitor and strike monitor
- DLMS\* Dual lock monitors and strike monitor
- OPT-1LM Single lock monitor
- **OPT-1DLM** Dual lock monitors
- 1500-104-XXX

Lip extension trim adapter

- 1500-106-XXX 4500 adapter and trim enhancer kit (finish to match)
- 1600-104-XXX Lip extension trim adapter
- 1600-106-XXX 1006 adapter and trim enhancer kit (finish to match)
- **HESCUT-MTK** Metal Template Kit



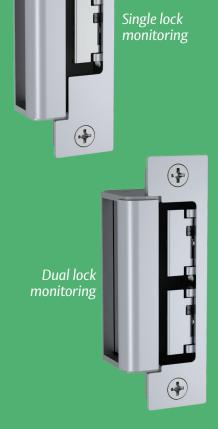



For easy 3D instructions, download the BILT mobile app






		WITH DEADBOLT			WITHOUT DEADBOLT		
		<b>●</b>		•	<b>*</b>		
		1600	1006	Competitor	1500	4500	Competitor
	UL 10C, 3 hour single door fire-rated	<b>~</b>	<b>~</b>	•	<b>~</b>	*	·
CERTIFICATIONS & LISTINGS	UL 10C, 1-1/2 hour doubled door fire-rated	<b>~</b>	<b>~</b>		~		
	CAN4-S104 (ULC-S104) fire door conformant	<b>~</b>	<b>~</b>	<b>~</b>	~	<b>~</b>	~
	UL 1034 burglary-resistant listed	<b>~</b>	<b>*</b>	<b>*</b>	<b>*</b>	<b>~</b>	~
	UL 1034 burglary-resistant listed for outdoor use	<b>~</b>	<b>*</b>		<b>*</b>		
	UL 294 (6th edition) listed	<b>~</b>	<b>*</b>		<b>*</b>	<b>~</b>	
	Environmental Product Declaration	Iteded	<b>~</b>		~	Iteded	
	ANSI/BHMA A156.31, Grade 1	<b>~</b>	<b>~</b>	<b>~</b>	~	<b>~</b>	~
	NFPA-252 fire door conformant	<b>~</b>	<b>~</b>	<b>~</b>	<b>~</b>	<b>~</b>	<b>*</b>
	ASTM-E152 fire door conformant	<b>~</b>	<b>~</b>	<b>~</b>	<b>~</b>	<b>✓</b>	<b>*</b>
	ANSI/SDI 250.13 windstorm resistant	<b>✓</b>	<b>~</b>		<b>~</b>		
	ANSI-ASTM E330	<b>~</b>	<b>*</b>		<b>~</b>		
	Florida Building Code approved TAS 201, 202, 203	✓	*		<b>~</b>		
	California Fire Marshal listed	<b>✓</b>			<b>~</b>	*	
	RoHS compliant	<b>~</b>	<b>~</b>	?	<b>~</b>	*	?
	Patented design	Applied	<b>~</b>	Applied	Applied	<b>~</b>	Applied
	Accommodates cylindrical and mortise latchbolts	<b>~</b>	*	*	*	<b>~</b>	<b>~</b>
	Accommodates all brands of mortise locks	<b>~</b>	<b>*</b>	<b>*</b>	<b>*</b>		~
	Accommodates 1" deadbolts	✓	*	✓			
	Release and recapture 1" deadbolt		*				
	Installs in fire listed 2" frame with 1/2" drywall				<b>~</b>	*	~
	Strike body depth	1-5/8"	1-11/16"	1-5/8"	1-3/8"	1-3/8"	1-3/8"
	Strike cavity height	3-1/4"	3-1/4"	3-1/4"	3-1/4"	2-11/16"	3-1/4"
	Tamper resistant, stainless steel construction	✓	*	✓	*	*	~
	Static strength (lbs)	1500	3070	1500	1500	3000	3250 Factory Test
RES	Dynamic strength (ft-lbs)	70	350	70	70	100	
STANDARD FEATURES	Endurance (cycles)	1M	1M	2M Factory Test	1M	1M	1M
	Full finished face plate, keeper, case and trim	<b>~</b>			✓		~
	Field selectable fail safe/fail secure	<b>~</b>		<b>*</b>	✓	*	
	Non-handed	✓	•	•	<b>*</b>	*	<b>✓</b>
	Horizontal adjustment	Integrated	Shims	Shims	Integrated	Shims	Shims
	Plug-in connector	<b>✓</b>	•	•	•	•	<b>*</b>
	Trim enhancer included	<b>*</b>	•	•	<b>✓</b>	✓	<b>✓</b>
	Lip extension (sizes)	1/2"	1+"		1/2"		1/4"
	Lock monitor	Field Install*	<b>✓</b>	Field Install	Field Install*	<b>*</b>	<b>~</b>
	Lock door position monitor	Factory Install			Factory Install*		
	Strike locked monitor	<b>*</b>	<b>*</b>		<b>*</b>	<b>*</b>	
	Metal template kit for easy installation	<b>✓</b>	<b>✓</b>	All	<b>✓</b>	<b>✓</b>	All
	Frame type  Available finishes	All 7	All 7	All 1	All 7	All 7	All 6
	Dual voltage 12 or 24	<i>'</i>	<i>'</i>	·	<i>'</i>	<i>'</i>	• • • • • • • • • • • • • • • • • • •
SICA	ACorDC	<b>*</b>	•	*	*	*	<b>*</b>
ECT	Current at 12 volts	0.24 A	0.45 A	0.38 A	0.24 A	0.24 A	0.24 A
SD EI	Current at 24 volts	0.12 A	0.45 A	0.19 A	0.12 A	0.12 A	0.11 A
NDA	Continuous duty	v.12 / √	0.23 /\	v.13 ∧	v.12 /\	<i>✓</i>	<b>√</b>
STANDARD ELECTRICAL	PoE friendly (under 0.25 amps)	<b>*</b>	-	<b>*</b>	*	*	· ·
	- To Emerical funder 0.25 dirips)	·		•	•	•	

 $*Order non-standard\ option\ factory\ installed.$ 

# Interchangeable Faceplate Kits for Latchbolts and Deadbolts



1500 & 1600 1LB Faceplate Kit for Latchbolts



1600 1DB Faceplate Kit for **Deadbolts** 





The ASSA ABLOY Group is the global leader in access solutions. Every day we help people feel safe, secure and experience a more open world.

#### **USA**

800 626 7590 | hesinnovations.com

customerservice.hes@assaabloy.com | techsupport.hes@assaabloy.com | orders.hes@assaabloy.com

#### **CANADA**

800 461 3007 | assaabloydss.ca

sales.dss.ca@assaabloy.com | orders.dss.ca@assaabloy.com

Printed in the U.S.A.

Patent pending and/or patent www.assaabloydss.com/patents

Copyright © 2022, Hanchett Entry Systems, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of Hanchett Entry Systems, Inc. is prohibited. HES-087-1072